

Oliveri Owner's Manual

INSTALLATION INSTRUCTIONS

WARNING: For correct operation of this system it is essential to observe the instructions below.

IMPORTANT NOTES

- When installing this filter system in a new home or kitchen please ensure that the cold water lines under the sink are flushed to remove all debris within the pipes, before installation of the water filter system.
- This Water Filtration System should be installed in accordance with any local Water Authority by-laws. **Australian Standard AS3500**
- Where water pressure exceeds 500 kPa, and/or your home is subject to water hammer, a suitable pressure limiting valve must be installed prior to connection to the filter system.

1. Open Carton and Inspect Parts.

Parts included – refer installation diagram Item No.

- | | |
|---|---|
| Head Assembly with Mounting Bracket | ① |
| Filter Cartridge | ② |
| Mounting Screws | ③ |
| Dual Check Valve | ④ |
| Pex Hose 650mm – ½” female to 3/8” male with sealing o-ring | ⑤ |
| Brass Hex Nipple 3/8” male to ½” male with sealing o-ring | ⑥ |
| Horizontal Stabilizing Bracket | ⑦ |
| Plumbing Tape | ⑧ |

2. Ensure that the cold water at mains supply is turned off

Where an existing tap and connections are already installed - after you have turned off the mains cold water at the mini cistern tap, open the kitchen / mixer tap and release any water pressure.

Unscrew the braided flex hose from the existing cold water line mini cistern tap or isolation valve. Clean the ½” male water connection thread.

3. Undersink Mounting Position

As you will note from the associated diagram, this Inline Filter System can be installed in either the horizontal or vertical position. Horizontal is preferable.

a) Horizontal Position

Measure 460mm horizontally, and mark the mounting location for the side of the Filter Head

Assembly and end of the filter cartridge. Make sure there is adequate space to avoid crimping the water line flex hoses. Also make sure your chosen location offers easy access for future cartridge changes and installation of the stabilizing support bracket. (item 7).

b) Vertical Installation

Measure 460mm from the base of the cabinet (or shelf), and mark the mounting location for the top of the Filter Head Assembly. Make sure that there is adequate space to avoid crimping the water line flex hoses. Also make sure your chosen location offers easy access for future cartridge changes.

4. Important - If necessary you can easily change the direction of the flow of water through the inlet and outlet of the filter system. You will notice on the head assembly that the inlet is shown by the word “IN” and the outlet is shown by the word “OUT”. To change direction, simply remove the four (4) screws that hold the mounting bracket to the head assembly and replace/refit the mounting bracket in the opposite direction. This allows flexibility when choosing the desired location for your filter system.

- Take the Pex Hose 3/8” male connection (item 5) and screw this connection to the inlet side of the Filter Head Assembly (item 1). This hose fitting has a sealing o-ring and does not require plumbing tape or compound to be applied to create the seal (do not use). You will notice on the head assembly that the inlet is shown by the word “IN” and the outlet is shown by the word “OUT”.
- Take the Brass Hex Nipple with o-ring (item 6) and screw this connection into the outlet side of the filter head (item 1). This brass fitting has a sealing o-ring and does not require plumbing tape or compound to be applied to create the seal (do not use).

IMPORTANT: Plumbing tape and/or sealing compounds shall not be used as item 5 and item 6 have a sealing o-ring. Use of thread tape or sealing compounds may result in damage to the filter head resulting in product failure and water leaks and will void the product warranty if used.

- Securely mount the Filter Head Assembly (item 1) on the cabinet wall using two of the mounting screws (item 3) provided. The filter head will be installed vertically or horizontally depending upon your desired location.

5. Connect Dual Check Valve – (item 4)

IMPORTANT – It is a legal requirement under Australian Plumbing Standards for a Dual Check Valve to be installed. If this part is not installed, all warranties are null and void. Refer to the NCC Volume 3, The Plumbing Code of Australia for the requirements of backflow prevention.

- Apply plumbing tape (item 8) to the ½” male water connection cistern tap fitting before screwing on the dual check valve (item 4).
- Also apply plumbing tape (item 8) to the ½” male connection on the outlet of the dual check valve. Wrap tape in direction of the threads to ensure a tight fit and avoid leaks.

6. Attach Pex Hose (item 5)

Connect the ½” female end of the Pex Hose (item 5) - to the ½” male end of the Dual Check Valve (item 4) as shown in the diagram.

7. Attach Filtered Water to Cold Water Line of Kitchen Tap

Take the braided flex hose that is attached to the kitchen tap and screw the ½” female end of the braided flex hose onto the hex nipple (outlet side of filter head).

8. For Horizontal Installations – Install Stabilizing Bracket (item 7)

Where the system is installed horizontally the unit requires support at the base of the filter cartridge with the Stabilizing Bracket (item 7). Locate the bracket (item 7) in a position that allows three important functions;

- Firstly, the bracket needs to be located so the Filter Cartridge can be removed when it is replaced. Suggested location is at the base of the filter cartridge.
- The bracket must be level with the filter head – so that the filter cartridge sits in a level horizontal position.
- Finally, the bracket needs to be screwed into the cabinet using the two remaining mounting screws (item 3) and set in a manner whereby the bottom of the bracket supports the water filled filter cartridge horizontally.

- The unit has not been installed in accordance with Oliveri Solutions Pty Ltd’ printed instructions and has not been installed in compliance with all applicable laws, regulations and industry standards.

- The unit has not been used in accordance with the manufacturer’s instructions.

- The unit does not meet the conditions for use described in the owners manual or performance data sheet for this unit.

- You use accessories or components which do not meet Oliveri Solutions Pty Ltd’ specifications as set out in the Owners Manual.

- The defect, fault or failure is due to normal wear and tear.

- The defect, fault or failure has occurred where the unit has been used reasonably or has reached its serviceable life.

- The serial or model number label of the unit is removed or defaced.

- The unit is serviced, modified, altered or repaired by an unauthorized or unqualified person.

How to make a claim under this warranty:

To make a claim under this warranty you must contact Oliveri Solutions Pty Ltd within 21days of the defect, fault or failure occurring. Oliveri Solutions Pty Ltd’ warranty Contact number is 1300137465. At the time of repair or replacement under your warranty claim you must provide to Oliveri Solutions Pty Ltd:

- Proof that you purchased the unit from an authorized retailer or dealer within the warranty time; and

- A copy of a certificate which certifies that the unit was installed in compliance with our printed installation instructions and all applicable laws, regulations and industry standards. Oliveri Solutions Pty Ltd will only pay for repair or replacement upon receipt of proof of your purchase showing the date of purchase.

Limitation of Liability of Oliveri Solutions Pty Ltd under this warranty:

Where a warranty exists or is implied by law, Oliveri Solutions Pty Ltd liability is limited (to the extent that it can be limited) to repair or replacement of the faulty Replaceable Element or the unit or an equivalent unit. Oliveri Solutions Pty Ltd may, in its discretion, choose whether it shall repair or replace any unit or Replaceable Element or Oliveri Solutions Pty Ltd may choose to pay to you the cost of replacing the Replaceable Element or the unit or the cost of having the unit repaired. To the extent permitted by law, Oliveri Solutions Pty Ltd assumes no liability whatsoever and disclaims all liability for direct, indirect or consequential loss, or special, general or other damage or expense caused by or arising out of:

- Any failure to install or use the unit in accordance with the Manufacturer’s Instructions, the Installation and Operating Manual or Oliveri Solutions Pty Ltd’ printed instructions; or

- The purpose for which you are purchasing the unit.

FS5010-LF

9. Install Filter Cartridge (item 2)

- Hold Filter Head (item 1) firmly with one hand.
- Align cartridge notches with filter head.
- Insert Filter Cartridge (item 2) and push into filter head assembly (item 1).
- Turn it to the right (about 1/4 turn) until it stops.


10. Flush the Filter Cartridge

- Turn water supply back on at either the mains or at the cold water mini cistern tap.
- At this stage check for leaks and fix if necessary
- Turn kitchen tap on and flush the filter cartridge for at least 2–3 minutes. Collect water in container and use for garden etc.

NOTE – Flushing the filter cartridge is important to remove air from the system and any loose carbon powder. At first the water may appear cloudy due to compressed trapped air in the filter and hoses. However the cloudiness will disappear over time and with use.

NOTES

- This installation must comply with all applicable state and local regulations.
- Do not use with water that is microbiologically unsafe or of an unknown quality without disinfection before or after the system.
- When storing filtered water in a refrigerator please ensure the container has an air tight seal.

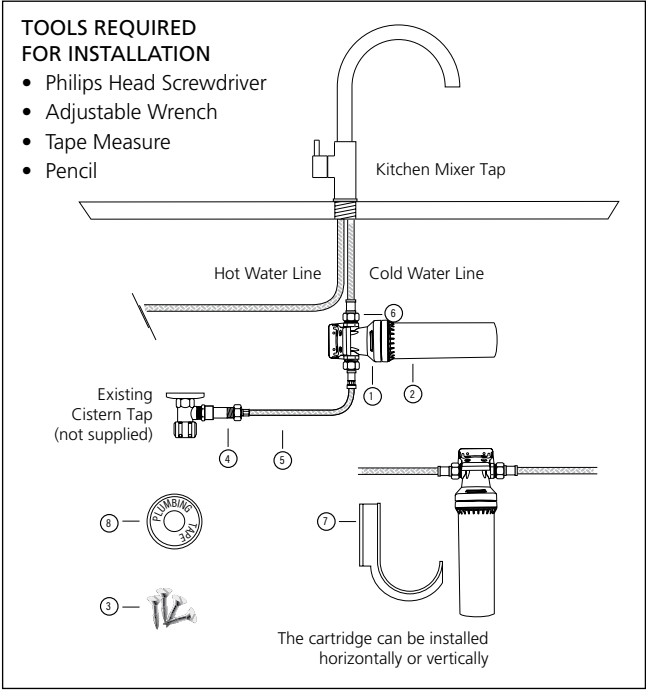

PRODUCT SPECIFICATION

- Usage: For mains cold water only.
- Temperature Range: 2-38°C
- Min.-Max. Working pressure 70-500 kPa
- Service Flow Rate: 6.3 Lpm*
- Capacity: 56,700 litres*
- Rating: 1 micron nominal
- Removes/reduces Chlorine, cysts, giardia, cryptosporidium, bad taste and odours, and all particles down to one micron in size.
- Filter Change: Annually or sooner if flow rate becomes inconveniently slow.
- This filter does not remove fluoride.
- Inhibits limescale buildup in water using appliances.

* Subject to water quality, water pressure and usage

- | | |
|---|---|
| ① Head assembly with Mounting Bracket | ⑥ Brass Hex Nipple 3/8” male to 1/2” male with sealing o-ring |
| ② Filter Cartridge | ⑦ Horizontal Stabilizing Bracket |
| ③ Mounting Screws | ⑧ Plumbing Tape |
| ④ Dual Check Valve | |
| ⑤ Pex Hose 650mm – 1/2” female to 3/8” male with sealing o-ring | |

WARRANTY

Product Specifications: The unit must only be used for a potable water source and with cold water (with a temperature range between 2 and 38° C).

Oliveri Solutions Pty Ltd warrants to you, the first person who has purchased and used the unit (“you”) that this unit is free from defects due to faulty material and workmanship in accordance with the conditions set out in this document. This warranty is provided to you in addition to your rights at law, including but not limited to your rights under the Trade Practices Act 1074 (Cth) and applicable legislation in your Australian State or Territory.

What this warranty covers:

This warranty covers defects due to faulty material and workmanship of the unit supplied to you:

- For a period of 6 years from the date of purchase in respect of the entire unit, excluding the Replaceable Elements. The Replaceable Elements are consumable components and all parts of the unit which can be replaced including but not limited to the filter or water

treatment cartridge if there is a defect in the filter or cartridge. This does not include the replacement of the filter or cartridge to extend the life of the filter or cartridge. The life of the filter cartridge is affected by water quality, usage and water pressure. The warranty only extends to the original purchaser of the unit.

What this warranty does not cover:

This warranty does not cover the unit or a Replaceable Element of the unit where:

- The defect, fault or failure is attributable, or substantially attributable to misuse, abuse, accident, misapplication, neglect, freezing, oxidizing agents (including but not limited to chlorine, ozone, chloramines and other related components) or act of God.
- The unit has been in conditions which do not conform to the recommended design guidelines or has been operated in a manner which is contrary to Oliveri Solutions Pty Ltd’ printed instructions.

You acknowledge that the quality of water supplied and your water usage rate and influent water pressure may vary seasonally or over a period of time.

In addition to this water characteristics can differ if the unit is relocated or the environment changes.

You acknowledge that Oliveri Solutions Pty Ltd does not know your requirements and cannot and does not warrant that the unit is fit for the purpose for which you intend to use the unit or is appropriate for the purpose for which you intend to use the unit. Oliveri Solutions Pty Ltd does not authorize others to assume any obligation on its behalf even if you inform them of the purpose for which you intend to use this unit.

WARNING Oliveri Solutions Pty Ltd does not recommend making alterations to your existing plumbing to accommodate this filter system. If you wish to modify existing plumbing you must comply with AS 3500 and use a licensed plumber. Where internal water pressure exceeds 860 kPa a Watermark approved Pressure Limiting Valve must be installed prior to the filter system.

WARNING The contaminants or other substances removed or reduced by this water treatment system are not necessarily in your water supply. Do not use with water that is microbiologically unsafe or of an unknown quality without disinfection before or after the system.

IMPORTANT This filter is designed to be used with mains/ city water supplies.

Use of this system may increase the bacterial content of water unless supplementary treatment is provided.

CAUTION Safely isolate the water supply prior to installing the filter system to avoid injury and property damage.

IMPORTANT NOTICE The Oliveri Solutions Pty Ltd FS5010-LF Inline Water Filtration System filters water down to 1 micron. The filter’s very fine mechanical and chemical filtering process removes chlorine, dirt and many other potential contaminants. When water is filtered so finely it can absorb part of everything it comes into contact with. This can cause taste and odour issues.

Accordingly, you may find that with new kitchen tapware the braided flex hose supplied with the new kitchen tap has a rubber internal. This rubber internal may, in some instances, cause taste and odour issues when the filtered water first comes into contact with the hose.

Should this occur then flush the filtered water through the hose over a period of time to remove taste and odour issues.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have all the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Refer to oliveri.com.au for warranty details.

