

# Oliveri Owner's Manual

## INSTALLATION INSTRUCTIONS

**WARNING:** For correct operation of this system it is essential to observe the instructions below.

### IMPORTANT NOTES

- When installing this filter system in a new home or kitchen please ensure that the cold water lines under the sink are flushed to remove all debris within the pipes, before installation of the water filter system.
- This Water Filtration System should be installed in accordance with any local Water Authority by-laws. **Australian Standard AS3500**
- Where water pressure exceeds 500 kPa, a suitable pressure limiting valve should be installed prior to connection to the filter system.

#### 1. Open Carton and Inspect Parts.

|                                             |   |
|---------------------------------------------|---|
| Parts included – refer installation diagram |   |
| Item No.                                    |   |
| Head Assembly with Mounting Bracket         | 1 |
| Filter Cartridge                            | 2 |
| Mounting Screws                             | 3 |
| Dual Check Valve                            | 4 |
| Pex Hose 550mm – ½” female to ¾” male       | 5 |
| Brass Hex Nipple ¾” male to ½” male         | 6 |
| Horizontal Stabilizing Bracket              | 7 |
| Plumbing Tape                               | 8 |

#### 2. Ensure that the cold water at mains supply is turned off

Where an existing tap and connections are already installed - after you have turned off the mains cold water at the mini cistern tap, open the kitchen / mixer tap and release any water pressure.

Unscrew the braided flex hose from the existing cold water line mini cistern tap or isolation valve. Clean the ½” male water connection thread.

#### 3. Undersink Mounting Position

As you will note from the associated diagram, this Inline Filter System can be installed in either the horizontal or vertical position.

- a) *Vertical Installation*  
Measure 460mm from the base of the cabinet (or shelf), and mark the mounting location for the top of the filter head. Make sure that there is adequate space to avoid crimping the water line flex hoses. Also make sure your chosen

location offers easy access for future cartridge changes.

#### b) Horizontal Position

Measure 460mm horizontally, and mark the mounting location for the side of the filter head and end of the filter cartridge. Make sure that there is adequate space to avoid crimping the water line flex hoses. Also make sure your chosen location offers easy access for future cartridge changes and installation of the stabilizing support bracket. (item 7).

#### 4. Important - If necessary you can easily change the direction of the flow of water through the inlet and outlet of the filter system. You will notice on the head assembly that the inlet is shown by the word “IN” and the outlet is shown by the word “OUT”. To change direction, simply remove the four (4) screws that hold the mounting bracket to the head assembly and replace/refit the mounting bracket in the opposite direction. This allows flexibility when choosing the desired location for your filter system.

- a) Apply plumbing tape (item 8) to the Pex Hose ¾” male connection (item 5). Wrap tape in direction of the thread to ensure a tight fit and avoid leaks (recommend 10–12 wraps of plumbing tape). Screw this connection to the inlet side of the filter head. You will notice on the head assembly that the inlet is shown by the word “IN” and the outlet is shown by the word “OUT”.
- b) Apply plumbing tape to the Brass Hex Nipple (item 6) both sides. Wrap tape in direction of the thread to ensure a tight fit and avoid leaks. Screw this connection to the outlet side of the filter head (item1).
- c) Securely mount the Filter Head Assembly (item 1) on the cabinet wall using two of the mounting screws (item 3) provided. The filter head will be installed vertically or horizontally depending upon your desired location.

#### 5. Important Dual Check Valve – (item 4) IMPORTANT – It is a legal requirement under Australian Plumbing Standards that the Dual Check Valve be installed. If this part is not

installed all warranties are null and void. Refer to the NCC Volume three, The Plumbing Code of Australia for the requirements of backflow prevention.

- a) Apply plumbing tape (item 8) to the ½” male water connection cistern tap fitting before screwing on the dual check valve (item 4).
- b) Also apply plumbing tape (item 8) to the ½” male connection on the outlet of the dual check valve. Wrap tape in direction of the threads to ensure a tight fit and avoid leaks.

#### 6. Attach Pex Hose (item 5)

Connect the ½” female end of the Pex Hose (item 5) - to the ½” male end of the Dual Check valve (item 4) as shown in the diagram.

#### 7. Attach Filtered Water to Cold Water Line of Kitchen Tap

Take the braided flex hose that is attached to the kitchen tap. Having applied plumbers tape to the ½” male hex nipple (item 6) – screw the ½” female end of the braided flex hose onto the hex nipple (outlet side of filter head).

#### 8. For Horizontal Installations – Install Stabilizing Bracket (item 7)

Where the system is installed horizontally the unit requires support at the base of the filter cartridge with the Stabilizing Bracket (item 7). Locate the bracket (item 7) in a position that allows three important functions;

- a) Firstly, the bracket needs to be located so that the filter cartridge can be removed when it is replaced. Suggested location is at the base of the filter cartridge.
- b) The bracket must be level with the filter head – so that the filter cartridge sits in a level horizontal position.
- c) Finally, the bracket needs to be screwed into the cabinet using the two remaining mounting screws (item 3) and set in a manner whereby the bottom of the bracket supports the water filled filter cartridge horizontally.

#### 9. Install Filter Cartridge (item 2)

- a) Hold filter head (item 1) firmly with one hand.
- b) Align cartridge notches with filter head.

- The unit has not been installed in accordance with Oliveri Solutions Pty Ltd's printed instructions and has not been installed in compliance with all applicable laws, regulations and industry standards.
- The unit has not been used in accordance with the manufacturer's instructions.
- The unit does not meet the conditions for use described in the owners manual or performance data sheet for this unit.
- You use accessories or components which do not meet Oliveri Solutions Pty Ltd specifications as set out in the Owners Manual.
- The defect,fault or failure is due to normal wear and tear.
- The defect, fault or failure has occurred where the unit has been used reasonably or has reached its serviceable life.
- The serial or model number label of the unit is removed or defaced.
- The unit is serviced, modified, altered or repaired by an unauthorized or unqualified person.

#### How to make a claim under this warranty:

To make a claim under this warranty you must contact Oliveri Solutions Pty Ltd within 21days of the defect, fault or failure occurring. Oliveri Solutions Pty Ltd's Warranty Contact number is 1300137465. At the time of repair or replacement under your warranty claim you must provide to Oliveri Solutions Pty Ltd:

- Proof that you purchased the unit from an authorized retailer or dealer within the warranty time; and
- A copy of a certificate which certifies that the unit was installed in compliance with our printed installation instructions and all applicable laws, regulations and industry standards. Oliveri Solutions Pty Ltd will only pay for repair or replacement upon receipt of proof of your purchase showing the date of purchase.

#### Limitation of Liability of Oliveri Solutions Pty Ltd under this warranty:

Where a warranty exists or is implied by law, Tasman liability is limited (to the extent that it can be limited) to repair or replacement of the faulty Replaceable Element or the unit or an equivalent unit.Oliveri Solutions Pty Ltd may, in its discretion, choose whether it shall repair or replace any unit or Replaceable Element or Oliveri Solutions Pty Ltd may choose to pay to you the cost of replacing the Replaceable Element or the unit or the cost of having the unit repaired. To the extent permitted by law, Oliveri Solutions Pty Ltd assumes no liability whatsoever and disclaims all liability for direct, indirect or consequential loss, or special, general or other damage or expense caused by or arising out of:

- Any failure to install or use the unit in accordance with the Manufacturer's Instructions, the Installation and Operating Manual or Oliveri Solutions Pty Ltd's printed instructions; or
- The purpose for which you are purchasing the unit.

You acknowledge that the quality of water supplied and

- c) Insert filter cartridge (item 2) and push into filter head assembly (item 1).
- d) Turn it to the right (about 1/4 turn) until it stops.


#### 10. Flush the Filter Cartridge

- a) Turn water supply back on at either the mains or at the cold water mini cistern tap.
- b) At this stage check for leaks and fix if necessary
- c) Turn kitchen tap on and flush the filter cartridge for at least 2–3 minutes. Collect water in container and use for garden etc.

**NOTE – Flushing the filter cartridge is important to remove air from the system and any loose carbon powder. At first the water may appear cloudy due to compressed trapped air in the filter and hoses. However the cloudiness will disappear over time and with use.**

## NOTES

- This installation must comply with all applicable state and local regulations.
- Do not use with water that is microbiologically unsafe or of an unknown quality without disinfection before or after the system.
- When storing filtered water in a refrigerator please ensure the container has an air tight seal / lid.

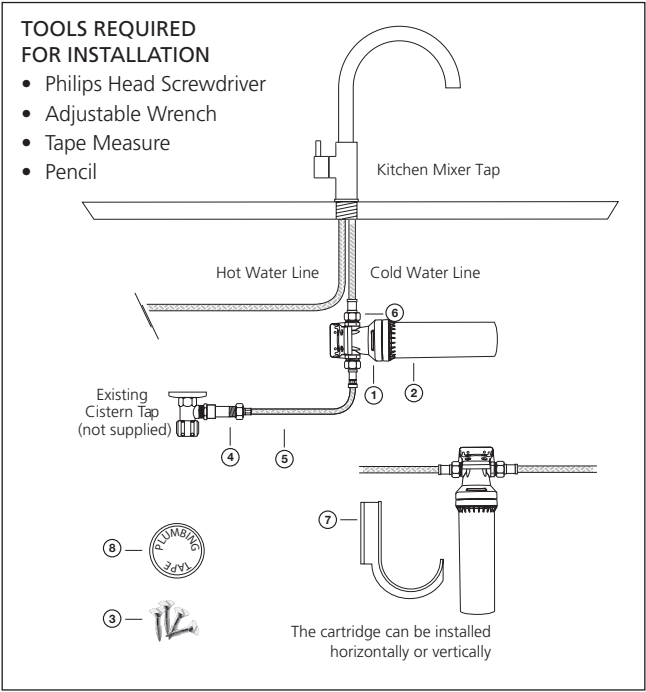

## PRODUCT SPECIFICATION

- Usage: For mains cold water only.
- Temperature Range: 2-38°C
- Min.-Max Working pressure 70-500 kPa
- Service Flow Rate: 6.3 Lpm\*
- Capacity: 56,700 litres\*
- Rating: 5 micron
- Removes/reduces Chlorine, bad taste and odours, and all particles down to five microns in size.
- Filter Change: Annually or sooner if flow rate becomes inconveniently slow.
- This filter does not remove fluoride.

\* Subject to water quality, water pressure and usage

- Filter Head assembly with Mounting Bracket
- Filter Cartridge
- Mounting Screws
- Dual Check Valve
- Pex Hose 550mm – 1/2” female to 3/8” male
- Brass Hex Nipple 3/8” male to 1/2” male
- Horizontal Stabilizing Bracket
- Plumbing Tape

## WARRANTY

Product Specifications: The unit must only be used for a portable water source and with cold water (with a temperature range between 2 and 38°C).

Oliveri Solutions Pty Ltd warrants to you, the first person who has purchased and used the unit (“you”) that this unit is free from defects due to faulty material and workmanship in accordance with the conditions set out in this document.This warranty is provided to you in addition to your rights at law,including but not limited to your rights under the Trade Practices Act 1074 (Cth) and applicable legislation in your Australian State or Territory.

#### What this warranty covers:

This warranty covers defects due to faulty material and workmanship of the unit supplied to you:

- For a period of 6 years from the date of purchase in respect of the entire unit, excluding the Replaceable Elements.The Replaceable Elements are consumable components and all parts of the unit which can be replaced including but not limited to the filter or water

treatment cartridge if there is a defect in the filter or cartridge.This does not include the replacement of the filter or cartridge to extend the life of the filter or cartridge. The life of the filter cartridge is affected by water quality, usage and water pressure.The warranty only extends to the original purchaser of the unit.

#### What this warranty does not cover:

This warranty does not cover the unit or a Replaceable Element of the unit where:

- The defect, fault or failure is attributable, or substantially attributable to misuse, abuse, accident, misapplication, neglect, freezing, oxidizing agents (including but not limited to chlorine, ozone, chloramines and other related components) or act of God.
- The unit has been in conditions which do not conform to the recommended design guidelines or has been operated in a manner which is contrary to Oliveri Solutions Pty Ltd's printed instructions.

your water usage rate and influent water pressure may vary seasonally or over a period of time.

In addition to this water characteristics can differ if the unit is relocated or the environment changes.

You acknowledge that Oliveri Solutions Pty Ltd does not know your requirements and cannot and does not warrant that the unit is fit for the purpose for which you intend to use the unit or is appropriate for the purpose for which you intend to use the unit. Oliveri Solutions Pty Ltd does not authorize others to assume any obligation on its behalf even if you inform them of the purpose for which you intend to use this unit.

**WARNING** Oliveri Solutions Pty Ltd does not recommend making alterations to your existing plumbing to accommodate this filter system. If you wish to modify existing plumbing you must comply with AS 3500 and use a licensed plumber. Where internal water pressure exceeds 860 kPa a Watermark approved Pressure Limiting Valve must be installed prior to the filter system.

**WARNING** The contaminants or other substances removed or reduced by this water treatment system are not necessarily in your water supply. Do not use with water that is microbiologically unsafe or of an unknown quality without disinfection before or after the system.

**IMPORTANT** This filter is designed to be used with mains/city water supplies.

Use of this system may increase the bacterial content of water unless supplementary treatment is provided.

**CAUTION** Safely isolate the water supply prior to installing the filter system to avoid injury and property damage.

**IMPORTANT NOTICE** The Oliveri Solutions Pty Ltd FS5050-LF Inline Water Filtration System For Harsh Water Conditions filters water down to 5 micron. The filter's very fine mechanical and chemical filtering process removes chlorine, dirt and many other potential contaminants. When water is filtered so finely it can absorb part of everything it comes into contact with. This can cause taste and odour issues.

Accordingly, you may find that with new kitchen tapware the braided flex hose supplied with the new kitchen tap has a rubber internal. This rubber internal may, in some instances, cause taste and odour issues when the filtered water first comes into contact with the hose.

Should this occur then flush the filtered water through the hose over a period of time to remove taste and odour issues.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have all the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. Refer to oliveri.com.au for warranty details.

\* Cartridge life and capacity will vary according to water pressure, water quality and usage.

and system maintenance.

Failure to register may result in missed maintenance reminders. Owner is responsible for timely cartridge replacement

Keep your contact details up to date to ensure you receive timely alerts.

Register online at [oliveri.com.au/support/product-care/product-registration](http://oliveri.com.au/support/product-care/product-registration) or scan the QR code in this manual.

To maintain the product in accordance with these requirements or the manufacturer's instructions.

To the extent permitted by law, the manufacturer accepts no liability for any loss or damage arising from the failure

Register your system to receive cartridge replacement reminders and important product notifications.

- Turn off the water supply upstream if the system will be unattended for extended periods.
- Use a drain pan connected to a suitable drain or fitted with a leak detector where damage could occur.
- Regularly inspect the system for leaks, wear, or deterioration.

To reduce risk of damage:

- Unintended water discharge, leakage, or product damage.
- Degradation or failure of the cartridge as particulates accumulate within the mechanism, or
- Reduced performance,

Failure to replace the filter cartridge within the recommended interval constitutes improper maintenance and misuse of the product will void the product warranty and may result in:

- **DO NOT exceed 12 months under any circumstances.**
- You must replace the cartridge every 57,700 litres or 6–12 months, which ever occurs first, or whenever you detect a decrease in flow or change in taste or odour.
- Unexpectedly if not properly maintained.

This product contains consumable components, including the filter cartridge, which must be replaced at regular intervals to ensure safe and effective operation. Water filter systems have a limited lifespan and may fail

**NOTICE OF REQUIRED MAINTENANCE:**

- Check for compliance with state and local laws and regulations.
- The contaminants or other substances removed or reduced by the water treatment system are not necessarily in your water.
- Flush system for 1 minute after period of non-use exceeding 7 days.
- Do not use with water that is microbiologically unsafe, or of unknown quality without adequate disinfection before or after the system.
- Do not use with water that is microbiologically unsafe, or of unknown quality without adequate disinfection of filter cartridges.
- This drinking water system must be maintained according to manufacturer's instructions, including replacement when shipped.
- Installation instructions, parts and service availability, and standard warranty are included with the product

**SPECIAL NOTICES:**

- Flush new cartridge at full flow for 2–3 minutes until air is purged.
- Install cartridge vertically or horizontally with stabilizing support bracket.
- Space required: 460mm x 225mm (allows space for cartridge replacement)

**GENERAL INSTALLATION REQUIREMENTS:**

- Capacity: 56,700 litres\*
- Pressure Requirement: 70-500 kPa
- Temperature: 2-38°C
- Flow Rate: 6.3 litres per minute.

**OPERATING SPECIFICATIONS:**

This system has been tested according to NSF/ANSI 42 for the reduction of the substances listed below.

The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI 42.

**HEALTH CLAIM PERFORMANCE CLASSIFIED BY NSF:**

FS5050-LF

Check for compliance with state and local laws and regulations. Product performance is dependant upon incoming water conditions. This drinking water system must be maintained according to the manufacturer's instructions, including replacement of cartridge.

|                                                                                                                     |                                          |                                                                               |                                                                                                                                               |     |
|---------------------------------------------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----|
|                                  |                                          | AS3497<br>Lic.WM-032108<br>IAPMO R&T OCEANA                                   | This appliance meets the domestic water treatment appliance Standards AS/NZS3497 for the following water treatment processes:                 |     |
| CLASS                                                                                                               | TREATMENT TYPE                           | FUNCTION                                                                      | PASS                                                                                                                                          |     |
| I.                                                                                                                  | Microbiological Status<br>Bacteriostatic | Will stop bacteria increasing but will not stop them unless II (a) is passed. | N/A                                                                                                                                           |     |
| II.                                                                                                                 | II (a)                                   | Microbiological Treatment<br>Bacteria Removal                                 | Will remove or inactivate bacteria.                                                                                                           | N/A |
|                                                                                                                     | II (b)                                   | Virus Removal                                                                 | Will remove or inactivate virus.                                                                                                              | N/A |
|                                                                                                                     | II (c)                                   | Protozoa Removal                                                              | Will remove or inactivate<br>Cryptosporidium and Giardia.Will not remove or inactivate bacteria and virus unless II (a) and II (b) is passed. | N/A |
| III.                                                                                                                | Turbidity and Particulate<br>Reduction   | Reduces cloudiness                                                            | N/A                                                                                                                                           |     |
| IV.                                                                                                                 | Taste and Odour Reduction                | Reduces tastes and odours                                                     | ✓                                                                                                                                             |     |
| V.                                                                                                                  | Chemical Treatment                       | Decreases carbon chemicals and chlorine                                       | ✓                                                                                                                                             |     |
| <b>WARNING:</b> FOR CORRECT OPERATION OF THIS APPLIANCE IT IS ESSENTIAL TO OBSERVE THE MANUFACTURER'S INSTRUCTIONS. |                                          |                                                                               |                                                                                                                                               |     |
| <b>NB:</b> Inhibits limescale buildup in water using appliances - as tested by the manufacturer.                    |                                          |                                                                               |                                                                                                                                               |     |

 ASSEMBLED IN THE U.S.A FROM U.S.A. & IMPORTED PARTS

Replacement Cartridge: FR5950

Scan QR code for product registration and cartridge replacement alerts.




Distributed by:



Oliveri Solutions Pty Ltd  
51 Naweena Rd,  
Regency Park, SA, 5010  
08 8348 6444  
[sales@oliveri.com.au](mailto:sales@oliveri.com.au)  
[oliveri.com.au](http://oliveri.com.au)

PR-P-OLIOMF55050-LF

Performance Data



Oliveri®  
WATER DRINKING SYSTEMS

OWNER'S MANUAL

Lead  FREE

INLINE WATER FILTRATION SYSTEM  
FOR HARSH WATER CONDITIONS

FS5050-LF

Provides quality filtered water without compromising on flow rate.

Filters water through your new or existing mixer tap.

Provides quality filtered water without compromising on flow rate.

- Drinking
- Tea & coffee
- Cooking
- Washing fruits & vegetables

The latest carbon block filtration technology absorbs:

- Chlorine
- Bad tastes
- Odours

Maintains healthy minerals and salts as well as fluoride

Helps to prevent the build up of limescale in water using appliances

Simple, easy to change cartridge replacements

unit with your actual water treatment needs.

Read this performance data sheet and compare the capabilities of this

**IMPORTANT NOTICE:**

Model No. FS5050-LF

INLINE WATER FILTRATION FILTER SYSTEM FOR HARSH WATER CONDITIONS