

## Holdfast Straight Grab Rails

**HF823-300 / HF823-600 / HF823-900**

Please install the Grab Rail according to this guide.

### IMPORTANT

**Prior to installation, test fit the Grab Rail to ensure it does not obstruct doors, surfaces, fixtures or switches. Ensure the wall fixing screws are anchored into masonry or timber. Do not install them directly into plasterboard. After installation, test the Grab Rail to confirm stability and correct operation.**

**Do not install outdoors, near chlorinated pools or in salt water environments.**

**WARRANTY** This Grab Rail is warranted to be free from manufacturing defects for a period of 15 years replacement parts and 1 year labour.

Subject to the terms contained in the full warranty information available at <https://oliveri.com.au/service-and-warranty>, where a genuine manufacturing defect arises within the warranty period Oliveri will, at its election, repair the defect or replace the product.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

### SERVICE

If the product requires servicing, please contact your installer. If the installer is satisfied that the problem is not due to poor installation, contact Oliveri's nominated Warranty Service Agent for assistance on:


Ph: 08 8348 6444 (choose the after sales service and warranty option)

Email: [warranty@oliveri.com.au](mailto:warranty@oliveri.com.au)


For full warranty information visit: <https://oliveri.com.au/service-and-warranty>

If a warranty service call finds that the product does not have a genuine manufacturing fault, our Warranty Service Agent reserves the right to pass on any call-out fee to the householder.


### PARTS LIST




300mm / 600mm / 900mm Grab rail assembly




Wall plugs and screws (includes 2 sets)



HF823-300

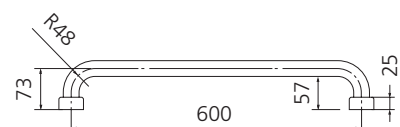

HF823-600

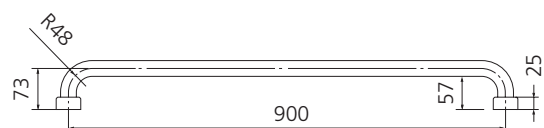


HF823-900

**IMPORTANT: Never use abrasive or harsh chemical cleaners. Wipe with warm soapy water to maintain surface finish.**

## Installation Steps


Preparation Tools: Drill driver, 8 mm drill bit, hammer, pencil and level.

1



Unscrew both end covers from their base plates and carefully slide them along the rail away from the fixing plates.

2




Position the grab rail on the wall in the required location. Check the rail is level and draw around each base plate.

3




Unscrew the base plates from the fixing nuts and set aside the grab rail.

4




Put the base plates back in position according to the wall outlines. Mark each fixing screw hole location.

5



Drill 8 mm Ø holes to a depth of 70 mm at each marked screw location point.  
**NOTE** Use an appropriate drill bit for the wall material.

6




Hammer a wall plug into each base plate fixing hole that has been drilled.

7



Tighten the screws, making sure the base plates are firmly secure and cannot move.

8



Locate grab rail onto the base plates and gradually begin to screw down the fixing nuts.  
**NOTE** Tighten nuts evenly and incrementally, alternating from end to end until fully secure.

9



Carefully slide end covers back along the rail to each base plate and screw down securely.

**IMPORTANT:** Ensure the mounting wall is strong enough to support the grab rail under load. Test after installation.